

Easy-Core™ 125



Processes
Flux-Cored

Product Number
K2696-1

See back for complete specs

Input Power
120/1/60

Input Current at Rated Output
20A

Rated Output Current/Voltage/Duty Cycle
90A/19V @ 20%

Output Range

30 - 125 A

50-500 WFS (1.3-12.7 m/min)

Max. OCV: 33

Weight/Dimensions (H x W x D)

49 lbs. (22.5 kg)

13.7 x 10.15 x 17.9 in.

(357 x 258 x 472 mm)

120 Volt AC Input Compact Wire Welder

Right out of the box, the Easy-Core™ 125 is set up for self-shielded flux-cored wire welding. It's just right for common steel welding, indoors or out. Plug in the Easy-Core™ 125 anywhere common 120 volt input power is available.

FEATURES

▶ Heavy Duty Wire Drive

- Fully adjustable drive system reduces the chance of wire tangling and crushing.
- Brass-to-brass gun connection enhances conductivity.
- Durable cast aluminum gear box delivers added drive torque and quiet operation.
- Easy-turn numeric drive tension indicator identifies optimized ranges for different wire diameters.

▶ Capable Performance

- Forgiving arc makes dialing in your application easy.
- Smooth arc starts with minimal spatter.
- 30-125 amp welding output range is enough for many tasks.
- Weld up to 5/16 in. (7.9 mm) steel using self-shielded Lincoln Electric Innershield® (FCAW-S) wires.

APPLICATIONS

- ▶ Shop
- ▶ Farm
- ▶ Home



Shown K2696-1

WHAT'S INCLUDED

Gun

- ▶ Magnum® 100L gun and 10 ft. (3.0 m) cable assembly with brass gun connection and 4-pin MS-Type connection for trigger control (K530-6)
- ▶ .035 in. (0.9 mm) contact tips (Qty. 3) (KH712)
- ▶ Gasless nozzle for Innershield® welding (KH726)
- ▶ Wire spindle adapter for 8 in. (203 mm) diameter spools (KH720)
- ▶ .025 - .035 in. (0.6 - 0.9 mm) wire diameter dual track drive roll for flux-cored welding (KP2948-1)

Welding Wire

- ▶ Sample spool of .035 in. (0.9 mm) diameter Innershield® NR®-211-MP flux-cored wire

Other

- ▶ Work clamp and 10 ft. (3.0 m) cable
- ▶ How To MIG Weld DVD
- ▶ Instruction manual

INPUT



120 V
INPUT

OUTPUT



Two Year Extended
Warranty Available in
the U.S.A. and Canada.




HEAVY DUTY WIRE DRIVE

Enhanced Quality

1. Brass-to-brass gun connection enhances conductivity.
2. Rigid drive aids wire alignment. The cast aluminum body with an enclosed multi-stage gear box delivers improved torque and quiet operation.

Easy to Use

3. Easy-turn drive tension adjustment with numeric tension indicators.
4. Fast tool-less drive roll changeovers. The dual track drive roll ensures positive flux-cored wire feeding with common wire diameters.

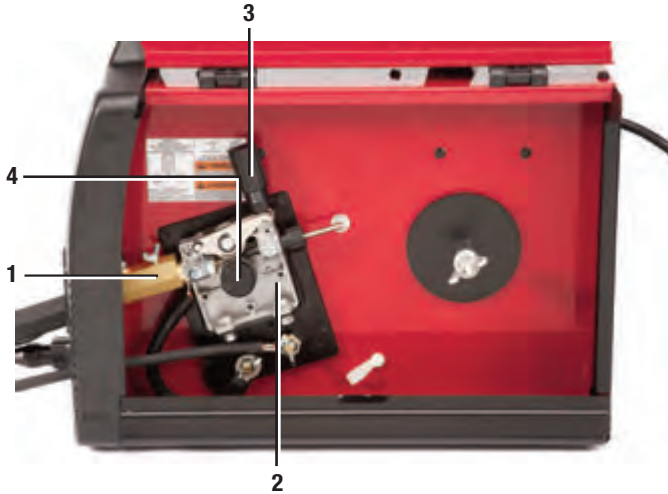

PERFORMANCE PLUS

Process	Wire Dia.	Material Thickness																			
		24ga.	22ga.	20ga.	18ga.	16ga.	14ga.	12ga.	10ga.	3/16"	1/4"	5/16"	3/8"	1/2"							
Flux-Cored Welding – Steel	.030 in.																				
	.035 in.																				

INNERSHIELD® NR²211MP SP MP
INNERSHIELD® NR²211MP SP MP

SP - Single Pass
MP - Multiple Pass

L12603-9

DRIVE ROLLS

Product Number	Wire Diameter in. (mm)	Process
KP2948-1	.025 - .035 (0.6 - 0.9)	Flux-Cored

RECOMMENDED ACCESSORIES

GENERAL OPTIONS



Welding Cart

Full-featured cart is designed to store and transport a welder, 80 cubic foot gas cylinder, welding cables and accessories. Includes an angled top shelf for easy access to welder controls, a lower tray for added storage space, a sturdy handle also used as a convenient cable wrap hanger.
Order K2275-1



Utility Cart

Heavy duty cart stores and transports welder, 150 cubic foot shielding gas cylinder, welding cables and accessories. Includes stable platforms for welder and gas bottle platform, lower tray for added storage capacity and adjustable height handle.
Order K520



Small Canvas Cover

Protect your welder when not in use. Made from attractive red canvas that is flame retardant, mildew resistant and water repellent. Includes a convenient side pocket to hold your welding torch or gun.
Order KH495

PRODUCT SPECIFICATIONS

Product Name	Product Number	Input Power	Rated Output Current/Voltage/Duty Cycle	Input Current @ Rated Output	Output Range	H x W x D inches (mm)	Net Weight lbs. (kg)
Easy-Core™ 125	K2696-1	120/1/60	90/19V/20%	20A	30-125 Amps DC 50-500 ipm WFS (1.3-12.7 m/min) Max. OCV: 33	13.7 x 10.15 x 17.9 (357 x 258 x 472)	49 (22.5)

For best welding results with Lincoln Electric equipment, always use Lincoln Electric consumables.
Visit www.lincolnelectric.com for more details.

CUSTOMER ASSISTANCE POLICY

The business of The Lincoln Electric Company is manufacturing and selling high quality welding equipment, consumables, and cutting equipment. Our challenge is to meet the needs of our customers and to exceed their expectations. On occasion, purchasers may ask Lincoln Electric for information or advice about their use of our products. Our employees respond to inquiries to the best of their ability based on information provided to them by the customers and the knowledge they may have concerning the application. Our employees, however, are not in a position to verify the information provided or to evaluate the engineering requirements for the particular weldment. Accordingly, Lincoln Electric does not warrant or guarantee or assume any liability with respect to such information or advice. Moreover, the provision of such information or advice does not create, expand, or alter any warranty on our products. Any express or implied warranty that might arise from the information or advice, including any implied warranty of merchantability or any warranty of fitness for any customers' particular purpose is specifically disclaimed.

Lincoln Electric is a responsive manufacturer, but the selection and use of specific products sold by Lincoln Electric is solely within the control of, and remains the sole responsibility of the customer. Many variables beyond the control of Lincoln Electric affect the results obtained in applying these types of fabrication methods and service requirements.

Subject to Change – This information is accurate to the best of our knowledge at the time of printing. Please refer to www.lincolnelectric.com for any updated information.

LINCOLN
ELECTRIC
THE WELDING EXPERTS®